





Product Specification

Indoor P1.25

Product Picture of Indoor P1.25 Series

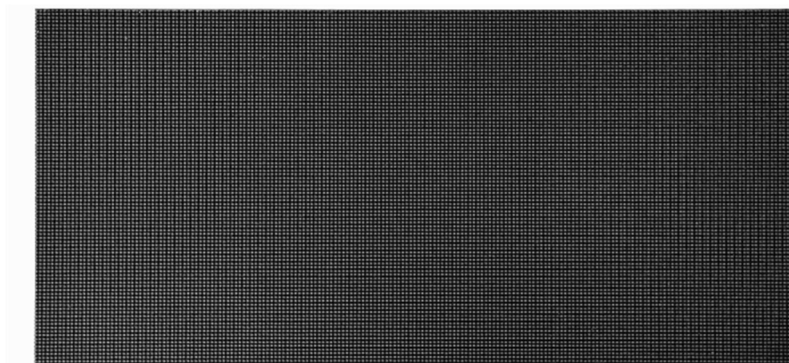


Hole Position of Indoor P1.25 Series

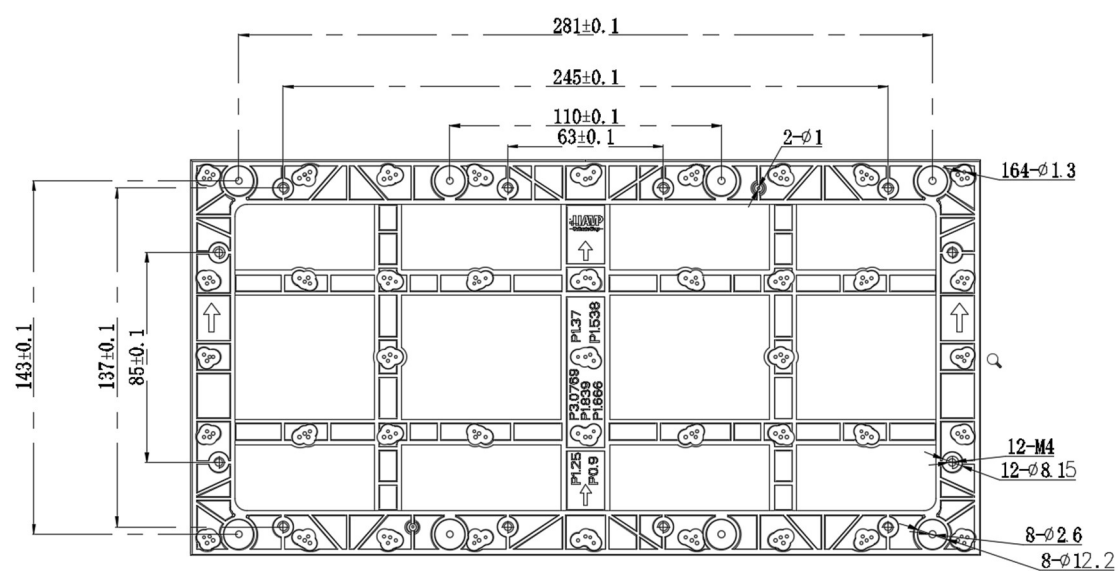

Wiring Diagram of Data and Power


Indoor P1.25 Receiving card loading recommendation

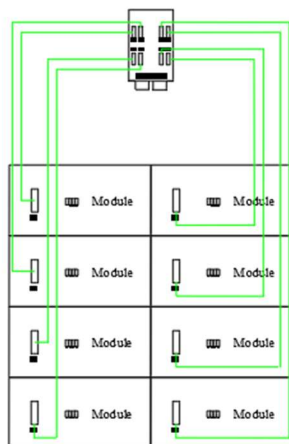

— : Flat cable

Recommendation: one Receiving card 512X512 pixels with 8 modules

P1.25 Power supply loading recommendation

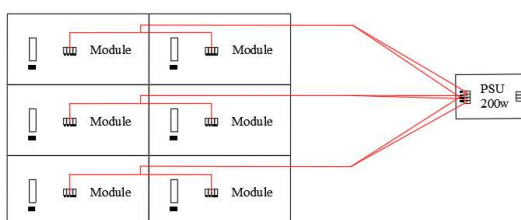

— : DC cable

Recommendation: one 200W power supply(4.2V) with 6 modules

Remark:1. The recommended diagrams are for reference only.

2.The recommended cabinet size is 640X480 mm.

Parameter of Indoor P1.25 Series

	Parameter Name	Product Parameter
Module	LED Type	SMD1010
	Pixel Pitch	1.25mm
	Module Resolution (W×H)	256*128=32768Pixels
	HUB	HUB320
	Module Dimension	320mm×160mm×16.6mm
	Module Weight	0.48±0.02kg
Optical	Single-dot Brightness Calibration	Support
	White Balance Brightness	500 CD/m ²
	Standard Color Temperature	6500K (1000K ~ 9500K Adjustable)
	Beam Angle (Hor/Ver°)	140°/140°
	Contrast Ratio	3000 : 1
Electronic	Input Power <Max>	586W/m ²
	Input Power <Typical>	195W/m ²
	Power Supply Input Voltage	AC90 ~ 132V/ AC186 ~ 264V, Frequency 47-63 (Hz)
Performance	Frame Changing Frequency	60Hz
	Drive Mode	Constant Current Drive / 64 Scan
	Refresh Rate	3840Hz
	Processing Depth	12~14 Bit
	Video Support	2K HD, 4K UHD
Environment	Life Typical Value (HRS)	50000H
	Working Temperature/ Humidity Range (°C/RH)	-20°C~50°C / 10%~65%RH (No Condensation)
	Storage Temperature / Humidity Range (°C/RH)	-10°C~30°C / 10%~60%RH (No Condensation)

Remark: 1. The above parameters are typical or recommended
2. Product parameters or configuration adjustments without notice
3. Customized products, please confirm the parameters with our company